

## PVC Class 100 Yellow Gas Pipe SCJ

PVC gas pipe with solvent cement joints (SCJ)  
ISO compatible outside diameter  
DN20 to DN100 manufactured to AS 1464

Vinidex PVC gas pipes are yellow in colour and suitable for pressure applications. PVC gas pipes are available in sizes DN20 to DN100.

### PART OF THE PVC PRESSURE SYSTEMS RANGE

- Manufactured in Australia
- Class 100 (maximum service pressure 100kPa)
- Solvent cement joint
- Available in 6m effective lengths
- Improved material performance
- Flow efficiency
- Light weight and easy to handle
- Suitable for aggressive or saline soils
- Range of compatible [PVC fittings](#) available



### Applications


- Supply of gaseous fuel

### Technical Data

Size Range	DN20 – DN100
Manufacturing Standard	AS 1464
Best Environmental Practice	<a href="#">BEP-PVC 570</a>
Quality Management System	ISO 9001
Certificate Number	<a href="#">QEC0570</a> (SAI Global)

ITEM	DESCRIPTION
Pipe material	<a href="#">PVC-U</a>
Colour	Yellow
Joint type	Solvent cement
Solvent cement type	<a href="#">Type P (green)</a>



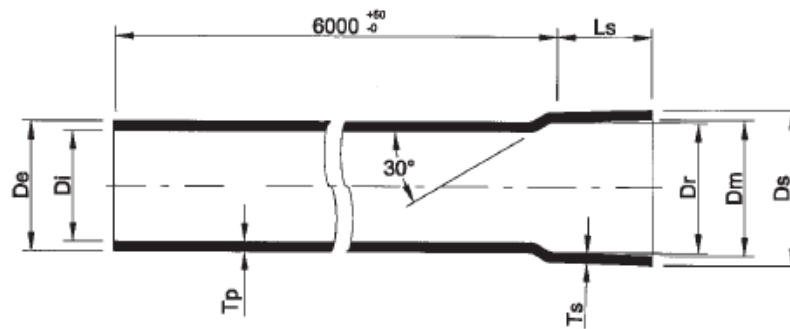

## Dimensions

Nominal Diameter DN	Outside Diameter		Tmean (mm)	ID (mm)
	Dm min (mm)	Dm max (mm)		
20	26.6	26.9	2.2	22.4
25	33.4	33.7	2.3	29.0
32	42.1	42.4	2.4	37.5
40	48.1	48.4	2.8	42.7
50	60.2	60.5	3.4	53.6
80	88.7	89.1	3.8	81.3
100	114.1	114.5	4.9	104.5

## Product Range

Vinidex Code	Nominal Diameter DN	Class	Mean Outside Diameter (mm)	Mean Wall Thickness (mm)	Length (m)	Joint Type	Min. (Pack) Quantity	Approx. Weight (kg/length)
17510	20	100	26.8	2.2	6	SCJ	1	1.4
17520	25	100	33.6	2.3	6	SCJ	1	1.9
17524	32	100	42.3	2.4	6	SCJ	1	2.5
17560	40	100	48.3	2.8	6	SCJ	1	3.3
17590	50	100	60.3	3.4	6	SCJ	1	5.1
17650	100	100	114.3	4.9	6	SCJ	1	14.6