

## Vinidex Draincoil SN20 Slotted Pipe

Polypropylene SN20 Draincoil for sub-surface drainage applications  
Corrugated drainage pipe  
DN100 to DN160 manufactured to AS 2439.1

Draincoil pipes are ideally used to take excess sub-surface water away from an area to prevent water logging. Draincoil is of a consistent high-quality and is available slotted or unslotted, with or without a geotextile filter sock.

### PART OF THE FLEXIBLE DRAINAGE SYSTEMS RANGE

- Manufactured in Australia
- Stiffness rating SN20
- Available in coils
- High impact strength
- Light weight and easy to handle
- Flexible
- Chemical resistant
- Corrosion resistant
- Weathering resistant
- Range of compatible push on fittings available



### Applications

- Civil projects
- Heavy vehicular loading


SN	8	20
Class	400	1000

### Technical Data

Size Range	DN100 – DN160
Manufacturing Standard	AS 2439.1
Quality Management System	ISO 9001
Certificate Number	QEC0570 (SAI Global)

ITEM	DESCRIPTION
Pipe material	Polypropylene
Colour	White
Joint type	Push on couplings
Filter sock material	Polyester/polypropylene



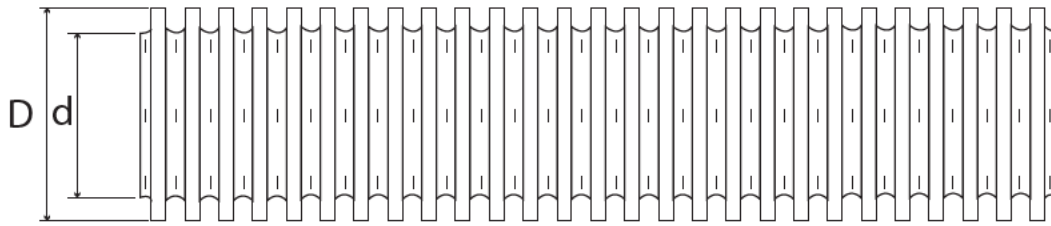

### Dimensions

Nominal Size DN	Outside Diameter D (mm)	Internal Diameter d (mm)	No. of Slotted Rows	Minimum Clear Water Opening (mm <sup>2</sup> /m)
100	100	86	6	1500
160	160	138	6	1500

### Product Range

Vinidex Code	Nominal Size DN (mm)	Type	SN	Coil Length (m)	Approx. Weight (kg/length)	Material
24723	100	Unslotted	20	100	68	PP
24724	100	Slotted no filter sock	20	100	68	PP
24725*	100	Slotted with RTA Filtersock	20	100	73	PP
24749*	160	Unslotted	20	20	47	PP
24750*	160	Slotted no filter sock	20	20	47	PP
24751*	160	Slotted with RTA	20	20	50	PP

\*Twinwall