

# PVC Slotted DWV Pipe SCJ

PVC slotted DWV pipe with solvent cement joints (SCJ)  
DN50 to DN300 manufactured to AS/NZS 1260

Vinidex uses both virgin and recycled raw materials to manufacture sustainable stormwater pipe systems. The economic advantages of Vinidex stormwater pipes and fittings, combined with their light weight, ease of installation and reliable performance, makes PVC the material of choice for drainage applications in Australia.

## PART OF THE PVC DRAIN, WASTE & VENT SYSTEMS RANGE

- Manufactured in Australia
- Range of stiffness classifications available
- Solvent cement joint
- 6m effective lengths
- Meets the clear water opening requirements of AS 2439.1 for Type 2 pipe
- Light weight and easy to handle
- Suitable for aggressive or saline soils
- Range of compatible PVC fittings available



### Applications


- Non-pressure stormwater drainage
- Below ground stormwater drainage in buildings and infrastructure
- Bioretention systems

### Technical Data

|                             |                     |
|-----------------------------|---------------------|
| Size Range                  | DN50 – DN300        |
| Manufacturing Standard      | AS/NZS 1260         |
| Best Environmental Practice | See Vinidex website |
| Quality Management System   | ISO 9001            |
| Certificate Number          | See Vinidex website |

| ITEM                | DESCRIPTION                   |
|---------------------|-------------------------------|
| Pipe material       | PVC-U                         |
| Colour              | Grey                          |
| Joint type          | Solvent cement                |
| Solvent cement type | <a href="#">Type N (blue)</a> |



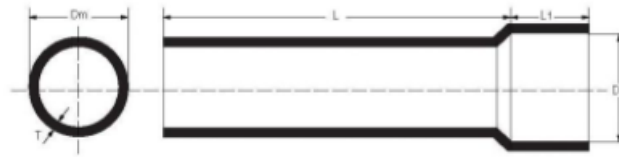

## Dimensions

| Nominal Diameter<br>DN | Stiffness<br>SN | Outside Diameter |                | Tmean<br>(mm)   | ID<br>(mm) |
|------------------------|-----------------|------------------|----------------|---|------------|
|                        |                 | Dm min<br>(mm)   | Dm max<br>(mm) |   |            |
| 50                     | -               | 55.7             | 56.0           | 2.2   | 51.5       |
| 80                     | -               | 82.3             | 82.7           | 2.9   | 76.7       |
| 100                    | 6               | 110.0            | 110.4          | Dimensions will vary depending on pipe wall construction. Refer to local product specification. |            |
| 100                    | 10              | 110.0            | 110.4          |   |            |
| 150                    | 4               | 160.0            | 160.5          |   |            |
| 150                    | 8               | 160.0            | 160.5          |   |            |
| 225                    | 4               | 250.0            | 250.7          |   |            |
| 225                    | 8               | 250.0            | 250.7          |   |            |
| 300                    | 4               | 315.0            | 315.9          |   |            |
| 300                    | 8               | 315.0            | 315.9          |   |            |

## Product Range

| Vinidex Code | Nominal Diameter<br>DN | Stiffness Class | Length<br>L (m) | Length<br>L1 (mm) | Crate Quantity |
|--------------|------------------------|-----------------|-----------------|-------------------|----------------|
| 20265        | 50                     | -               | 6               | -                 | 260            |
| 20312        | 80                     | -               | 6               | -                 | 122            |
| 20700        | 100                    | SN4             | 6               | 55                | 70             |
| 20718*       | 100                    | SN8             | 6               | 55                | 70             |
| 20728        | 150                    | SN4             | 6               | 80                | 26             |
| 20713        | 150                    | SN8             | 6               | 80                | 26             |
| 19139        | 225                    | SN4             | 6               | 125               | 12             |
| 19198        | 225                    | SN8             | 6               | 125               | 12             |
| 19210        | 300                    | SN2             | 6               | 175               | 6 & 8          |
| 19251        | 300                    | SN8             | 6               | 175               | 6 & 8          |

\*RRJ